


CADAN NOVA S SDI

445-74501918d

CADAN NOVA S SDI WALL / CEILING LUMINAIRE made of aluminium, natural anodised, satined PMMA opal diffuser light output direct / indirect, with converter, dimmability: DALI, IP20




DRAWING

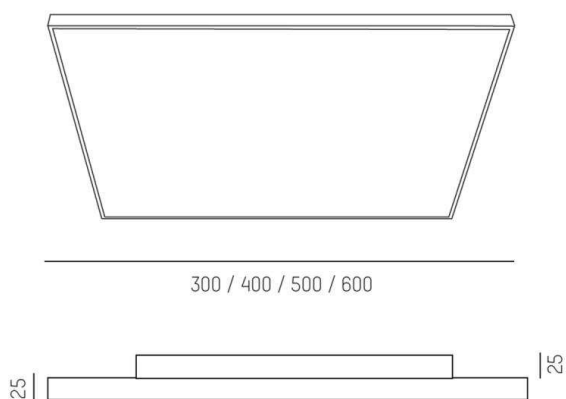

TECHNICAL DETAILS

System perform. [W]	33
Bulb type	LED
Luminous flux [lm]	4161
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	500
Width [mm]	500
Height [mm]	50
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	6,70
Color lamp	natural anodised
EAN-Number	9008905878787
Lifetime [h]	L85 B10 50 000
No. of luminaires B16A	15

LIGHT DISTRIBUTION CURVE

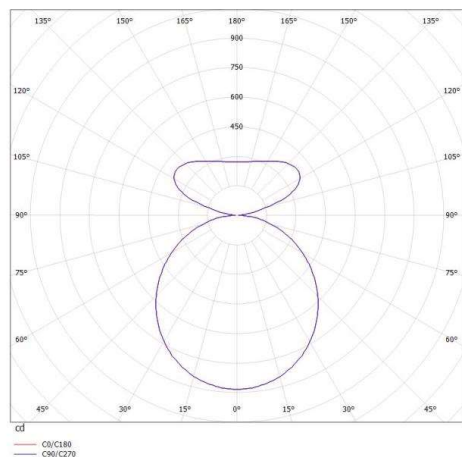

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.