


RIDE LENS TURN RECESSED

634-00701032905

RIDE LENS TURN RECESSED RECESSED CEILING LUMINAIRE made of die-cast aluminium, white, similar to RAL 9016, lens optic with anti-glare grid shiny black, beam 45°, light output direct, UGR <19, tilting 30°, without converter, max. 500mA, IP20




DRAWING

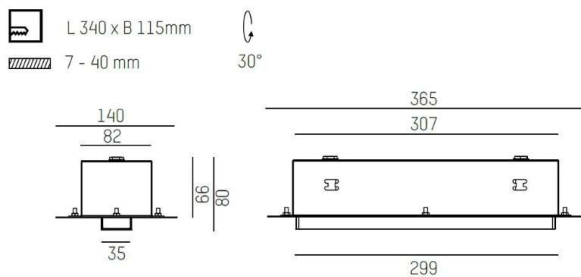

TECHNICAL DETAILS

Bulb type	LED
Luminous flux [lm]	1530
Current sec. [mA]	500
Colour temp. [K]	3000K
CRI	>90
UGR	<19
Optics	lens optics with glare control louvre
Designer	INHOUSE
Converter	without converter
Light output	direct
Beam angle [°]	45°
Material	die-cast aluminium
Length [mm]	365
Width [mm]	140
Height [mm]	80
Ceiling cutout [mm]	340x115
Ceiling thickness [mm]	1-20
Recess depth [mm]	80
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,74
Color lamp	white
RAL	9016
Glass color	shiny black
EAN-Number	9008905671470
Lifetime [h]	L80 B10 50 000

LIGHT DISTRIBUTION CURVE

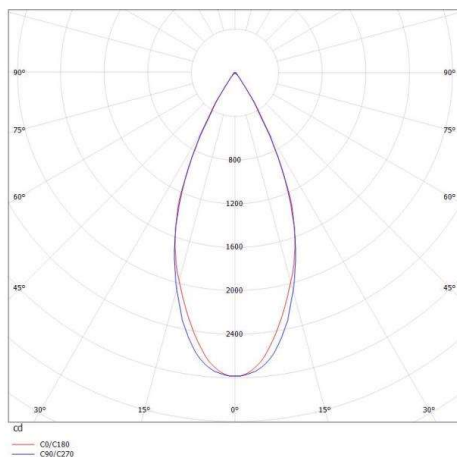

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.